


Lumirror® 60.01

Application

- Electrical insulation
 - Siliconizing
 - Mould release
- Printing & coating

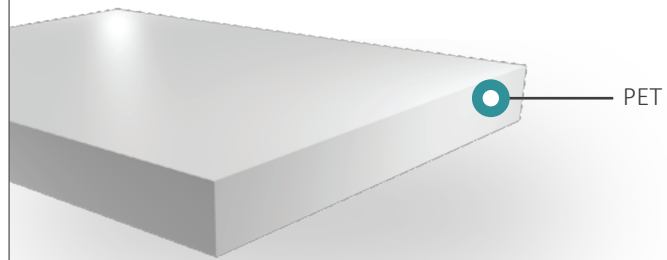

HAZY PET FILM WITH
HIGH ROUGHNESS

Benefits

- High dimensional stability
- Good flatness
- Excellent machinability due to high roughness
- Certified UL 746 B (105°C) for all thickness

Typical Values *

Properties	Test Method	Unit	4,5 µm	5,7 µm	8 µm	10 µm	12 µm	15 µm	19 µm	23 µm
YIELD										
Unit Weight		g/m ²	6.3	8	11.2	14	16.8	20.6	26.6	32.2
Area Yield		m ² /kg	158.7	125.3	89.3	71.4	59.5	48.5	37.6	31.1
MECHANICAL										
Tensile Strength MD	ASTM D 882	daN/mm ²	31	28	20	21	22	22	22	22
Elongation at Break MD		%	86	95	100	115	130	130	130	130
THERMAL										
Shrinkage 150°C 30mn MD	Internal Method	%	2.4	2.2	2.5	2.0	1.6	1.6	1.3	1.5
Shrinkage 150°C 30mn TD			0.6	0.5	0.5	0.5	0.5	0.5	0.1	0.1
OPTICAL										
Gardner Haze	ASTM D1003	%	9.5	10	3.5	3.5	3.2	3.6	3.2	4
SURFACE										
Roughness Ra	Internal Method	nm	134	143	30	30	30	30	30	30
Roughness Rz			928	894	350	350	350	350	350	350
ELECTRICAL										
Break down voltage	JIS C2151	kV	*	2.4	2.8	3.0	3.4	4.6	5.1	7.9
Volume resistivity	ASTM D257	Ω	*	*	*	*	*	*	*	*

	30 µm	36 µm	50 µm	75 µm	100 µm	125 µm	190 µm	250 µm	300 µm
	42	50.4	70	105	140	175	266	350	420
	23.8	19.8	14.3	9.5	7.1	5.7	3.8	2.9	2.4
	22	22	20	20	20	20	18	17	17
	130	130	130	130	145	140	170	190	190
	1.5	1.5	1.8	1.3	1.3	1.5	1.1	1.1	1
	0.1	-0.2	-0.1	0.3	0.4	0.3	0.5	0.4	0.4
	7	8	9.5	13.5	18.3	18.7	22.2	30	38
	40	40	45	30	30	30	30	40	40
	450	470	500	600	680	710	750	950	1000
	8.3	9	10.8	13.3	15.4	16.9	22.5	27	*
	*	*	*	*	*	*	3*10 ¹⁸	1,6*10 ¹⁸	*

Regulation

Lumirror® 60.01 complies with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

Presentation of the rolls

Roll packaging: The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2100mm.

Returnable packaging: Wooden flanges, plastic flanges and pallets are returnable.

Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

* These values do not constitute binding specifications

Lumirror® is a registered trademark of Toray Film Europe SAS - TFE January 2018

DISCLAIMER: This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.