


# Claryl® LID LID-O

## Application

- Lidding of various containers, especially dairy
- Paper/sealant lacquer laminates

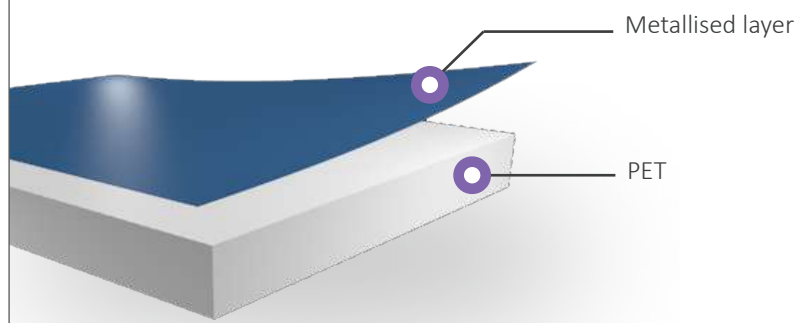

METALLISED PET FILM FOR LIDDING APPLICATIONS

## Benefits

- Easy opening without tearing
- Opaque gas barrier film
- High protection against natural and UV light
- High thermal stability and good machinability

Toray Films Europe SAS,  
Place d'Arménie,  
01700 Saint-Maurice-de-Beynost, FRANCE

To access Toray Films Europe's **certifications list**, please visit  
[www.torayfilms.eu/en/certifications](http://www.torayfilms.eu/en/certifications)

## Typical Values *(These values do not constitute binding specifications)*

Properties	Test Method	Unit	12 µm	19µm	23 µm	36 µm
<b>YIELD</b>						
Unit Weight		g/m <sup>2</sup>	16.8	26.6	32.2	50.4
Area Yield		m <sup>2</sup> /kg	59.5	37.6	31.1	19.8
<b>MECHANICAL</b>						
Tensile Strength MD	ASTM D 882	daN/mm <sup>2</sup>	19	18	21	21
Tensile Strength TD			21	21	21	24
Elongation at Break MD	ASTM D 882	%	100	120	130	129
Elongation at Break TD			80	85	100	106
<b>THERMAL</b>						
Shrinkage 150°C 30min MD	Internal Method	%	1.8	1.6	1.6	1.5
Shrinkage 150°C 30min TD			0.4	0.2	0.6	0.3
<b>OPTICAL</b>						
Optical density			2.1	2.1	2.1	2.1
<b>BARRIER</b>						
OTR. 50% HR. 23°C	ASTM F1927	cm <sup>3</sup> /m <sup>2</sup> per day	0.7	0.7	0.7	0.6
MVTR. 90% HR. 38°C	ASTM F1249	g/m <sup>2</sup> per day	1.0	1.0	1.0	1.0
<b>SURFACE</b>						
Metal adhesion / Heat seal test	Internal Method	N/38mm	1	1	1	1

## Regulation

Claryl® LID and LID-O comply with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

## Presentation of the rolls

**Roll packaging:** The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2100mm.

**Returnable packaging:** Wooden flanges, plastic flanges and pallets are returnable. The metallised side is identified on the labels:



## Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

Lumirror® is a registered trademark of Toray Films Europe SAS - TFE July 2025

**DISCLAIMER:** This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.