


# TORAYFAN® PC3

## Application

- Confectionery
  - Snacks
  - Bakery
  - Food
- Industrial

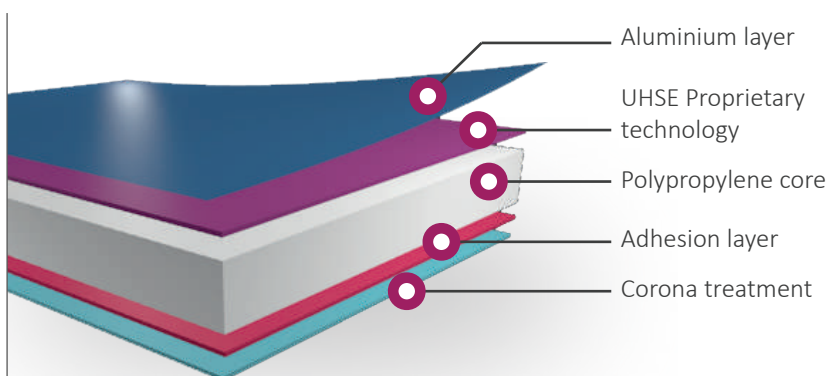

ULTRA HIGH BARRIER  
METALLIZED BOPP

## Benefits

- Guaranteed ultra high moisture barrier
- Guaranteed oxygen barrier
- Non-craze metal surface
- Excellent bonding in extrusion and adhesive laminations

## Typical Values *(These values do not constitute binding specifications)*

Properties	Test Method	Unit	12,5 µm	15 µm
Nominal Yield		m <sup>2</sup> /kg	87,6	73
Tensile Strenght @ Break MD	ASTM D 882	daN/mm <sup>2</sup>	15	15
Tensile Strenght @ Break TD			30	30
Young's Modulus MD	ASTM D 882	daN/mm <sup>2</sup>	220	220
Young's Modulus TD			400	400
Elongation @ Break MD	ASTM D 882	%	160	200
Elongation @ Break TD			50	50
Dimensional Stability MD	Internal Method	%	8	8
Dimensional Stability TD			5	4
COF (sealant to sealant)	ASTM D1894	static	0,3	0,3
		dynamic	0,3	0,3
Wetting Tension	ASTM D2578	dyne/cm	40	40
OTR, 0% HR, 23°C	ASTM D3985	cc/m <sup>2</sup> /day	10	10
MVTR, 90% HR, 38°C	ASTM F1249	g/m <sup>2</sup> /day	<0,1	<0,1

## Regulation

Torayfan® PC3 complies with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

## Presentation of the rolls

**Roll packaging:** The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2450mm.

**Returnable packaging:** Wooden flanges, plastic flanges and pallets are returnable. The metallised side is identified on the labels.



Metallized side inside

## Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

Torayfan® is a registered trademark of Toray Films Europe SAS - TFE April 2018

**DISCLAIMER:** This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.